


**GENERAL SPECIFICATIONS:**

STANDARD UNIT  
 HOUSING: CAST BRONZE, AND BRASS  
 INTERNAL PARTS: BRASS, & S.S.  
 FINISH: NATURAL  
 CONTACT BLOCKS : SQUARE D  
 CLASS 9001 TYPE KA1 - FINGER SAFE  
 MAX RECOMENDED ARRANGEMENT  
 8 N.O. & 8 N.C.  
 KEY RELEASED IN ONE POSITION ONLY  
 MULTI POSITION KEY RELEASE AVAILABLE  
 ON SPECIAL ORDER  
 ADDITIONAL ACCESSORIES, OPTIONS,  
 CONTACT BLOCKS, SOLENOIDS, &  
 ARRANGEMENTS AVAILABLE  
 PLEASE CALL FACTORY FOR DETAILS

MAX CURRENT RATINGS INDUCTIVE 35%POWER FACTOR			
VOLTS	MAKE	BREAK	CONT
120VAC	60A	6A	10A
240VAC	30A	3A	10A
480VAC	15A	1.5A	10A
600VAC	12A	1.2A	10A
DC INDUCTIVE & RESISTIVE			
120VDC	1.1A	1.1A	10A
250VDC	0.55A	0.55A	10A
600VDC	0.2A	0.2A	10A

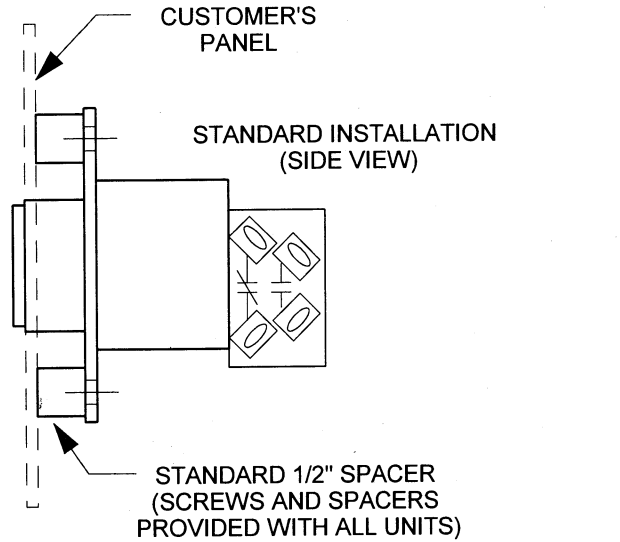

**TYPE B-8003 TECHNICAL INFORMATION**

UNIT DIAGRAM	CAT#/TYPE	DESCRIPTION	AVAILABLE ACCESSORIES
	S105840Y B-8003-1-1 1 LB 10 OZ	1 KEY PANEL MOUNT KEY SWITCH WITH 2 N.O. & 2 N.C. CONTACTS	KC ACYL
	S105841Y B-8003-1-2 1 LB 13 OZ	1 KEY PANEL MOUNT KEY SWITCH WITH 4 N.O. & 4 N.C. CONTACTS	DC2 DC1M
	S105842Y B-8003-1-3 2 LB 0 OZ	1 KEY PANEL MOUNT KEY SWITCH WITH 6 N.O. & 6 N.C. CONTACTS	DUAL
	S105843Y B-8003-1-4 2 LB 4 OZ	1 KEY PANEL MOUNT KEY SWITCH WITH 8 N.O. & 8 N.C. CONTACTS	

**SUPERIOR INTERLOCK CORPORATION (718) 821-8949 \* fax (718)417-6162**  
**73-39 CENTRAL AVENUE, GLENDALE, NY 11385 USA**  
[www.superiorinterlock.com](http://www.superiorinterlock.com)